


Binding Manual





Thanks for purchasing Now bindings. This is the revolutionary snowboard binding design inspired by the dynamics of a skateboard truck. These bindings will provide unparalleled performance and comfort if properly set up. To get the most out of your bindings, please take the time to read over this manual to learn how to customize them to suit your needs and style.






x8



x8




x8



x2

x1

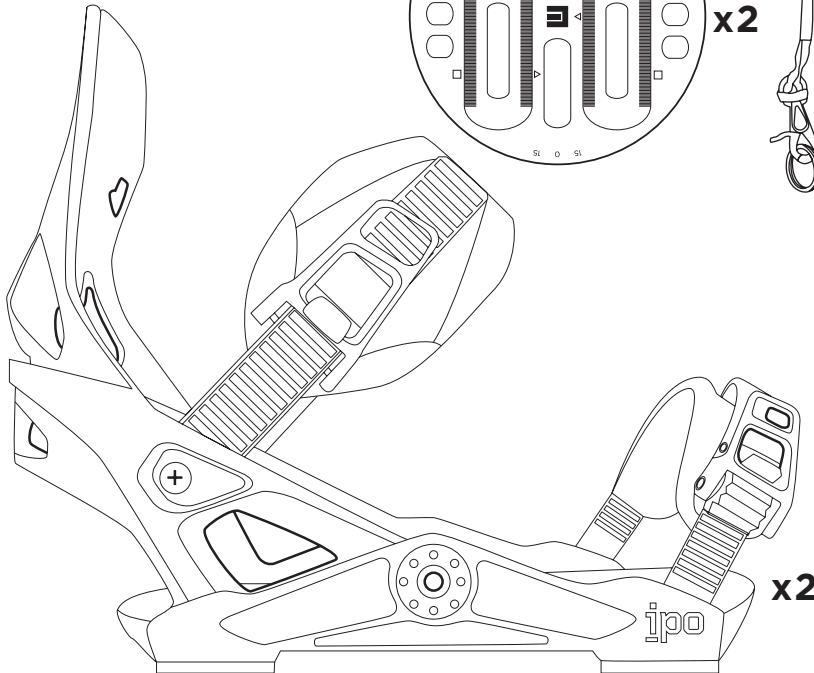

x2


***Phillips #3 screwdriver needed for binding installation.**





Opening the Foot Pillow

To open your Foot Pillow, grab the soft EVA pad at the heel and pull upward. Carefully read the instructions provided on the disc cover before mounting your bindings onto your board.

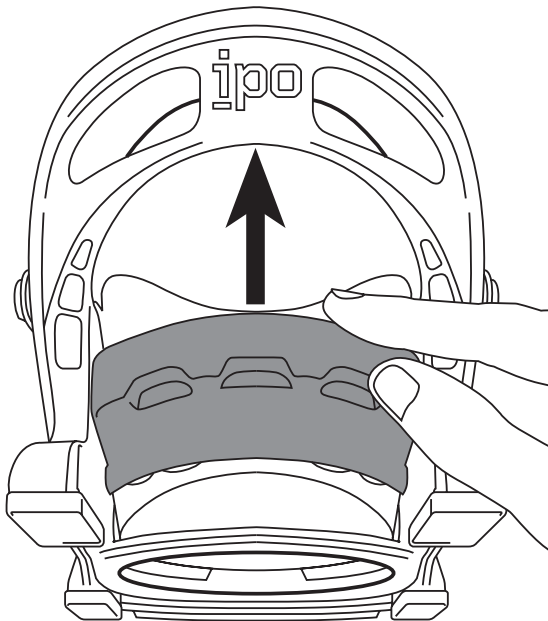




Hole Patterns and EST Configuration

IMPORTANT: Note the direction that the arrows are pointing on the washers.



4-HOLE PATTERN

Arrows on washers must point towards the squares.

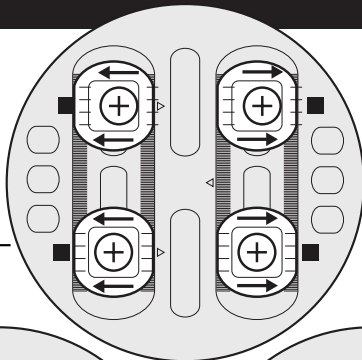

EST/CHANNEL

No washers needed.

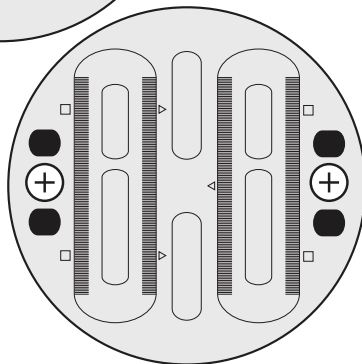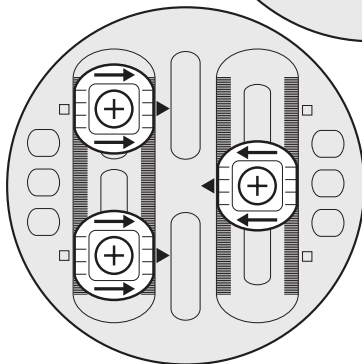

3-HOLE PATTERN:

Arrows on washers must point towards the triangles.






Disc Orientation Options

Stance Width Adjustment


toe

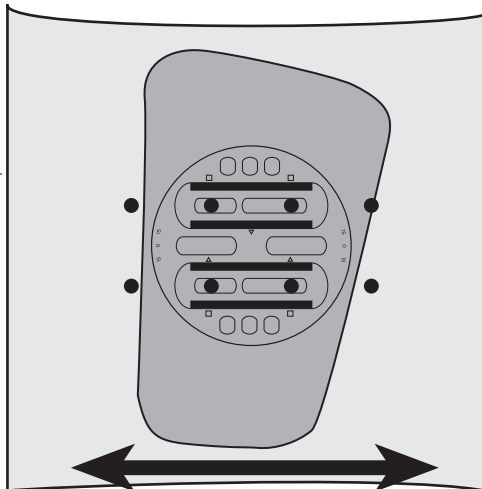

heel

Boot Size Adjustment

toe

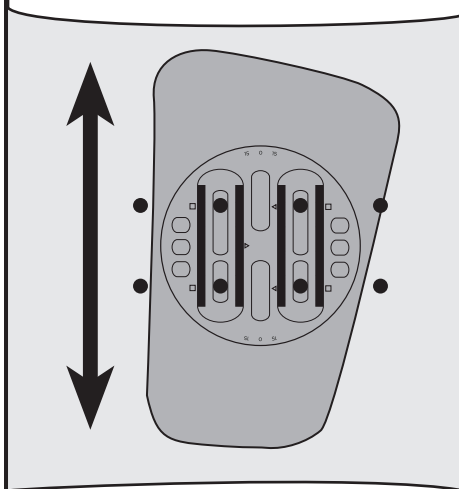


heel






MEDIUM BINDING:


Boot Size 7



Boot Size 8




Boot Size 10




LARGE BINDING:


Boot Size 10



Boot Size 11



Boot Size 12+



Toe and Heel Boot Size Adjustment Chart



All snowboard boots are not alike, so please check your settings and make sure that your boot is centered across your board.





Toe Strap Placement


Toe straps can be positioned on top of your foot or at the end of your boot, and anywhere in between.

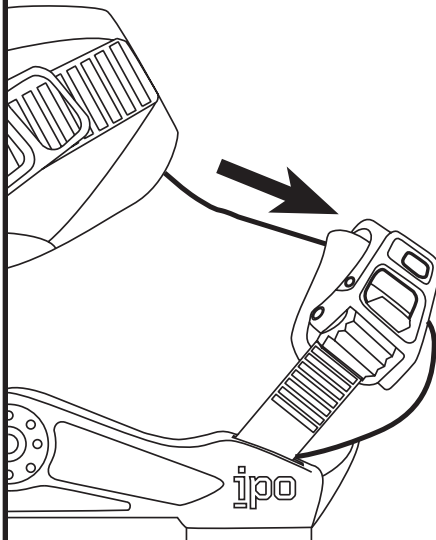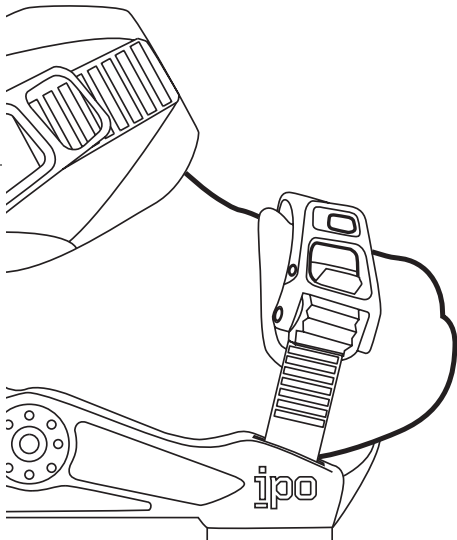



Straps Adjustments

To adjust, simply open the lever to disengage the teeth, slide your strap forward or back, and close the lever.

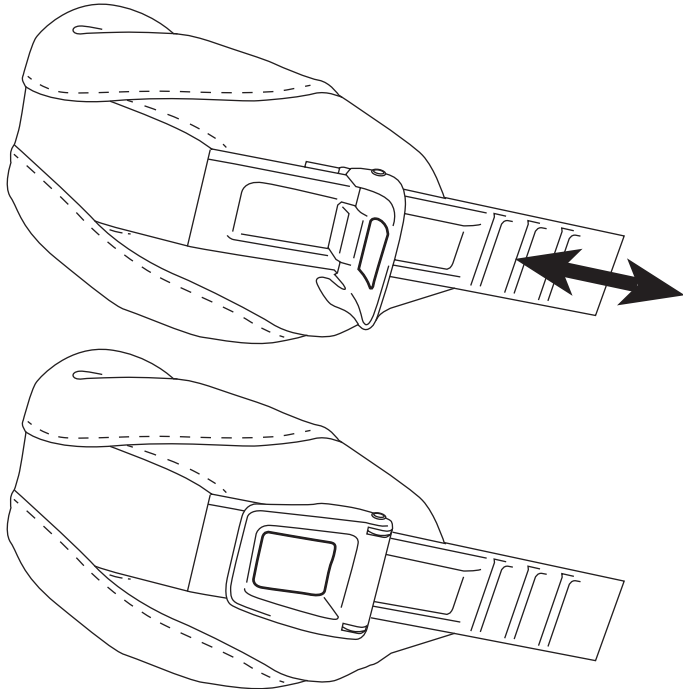



FlipIt Straps

Flip It Straps allow you to interchange your ankle straps between your left and right binding to create a customized riding experience. Ride with your ankle straps in the “upward” position for added lateral support and board response or flip it into the “downward” position for solid heel support and more tweaking ability.



UPWARD

Strap Support Setting



DOWNWARD

Strap Support Setting

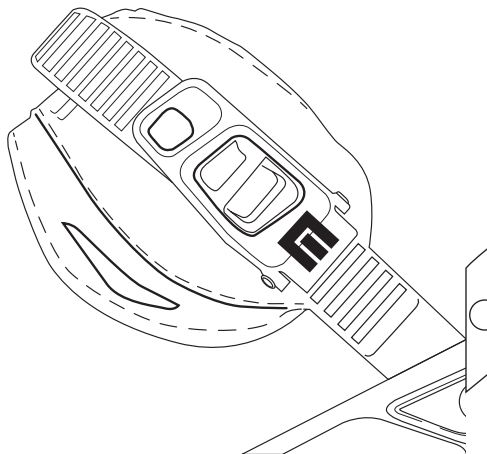
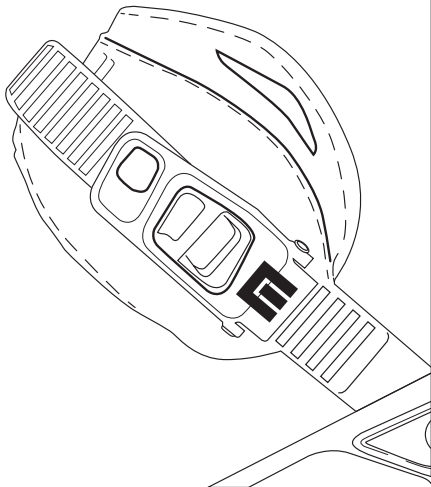




FlipIt Straps Instructions

Step 1: Lift the tool-free
NOW lever.

Step 2: Unscrew the tool-free
NOW lever. Remove
the ankle straps. Flip it
around and switch it to the
other binding.

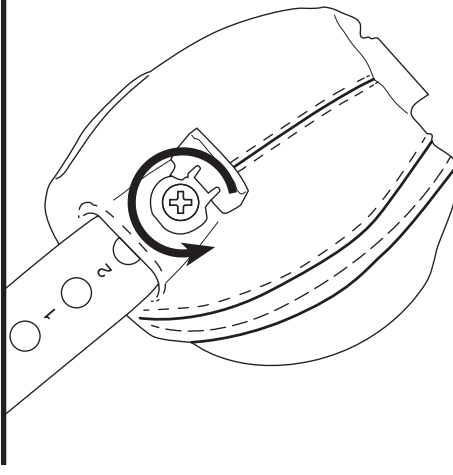
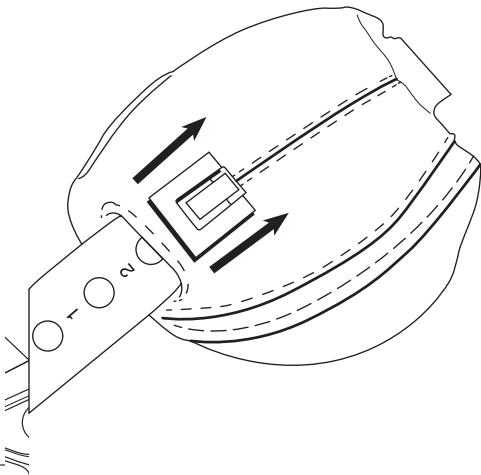




NoBack Mode

Step 1: Remove highback by removing hardware on both sides with a phillips #3 and a 4mm allen key.

Step 2: Drop the plastic washers into the cavity where the highback was previously secured and re-install the hardware. *Note: make sure that the t-nuts are properly fitted in the binding cavity and use a 4mm allen key to hold the t-nuts in their place .*

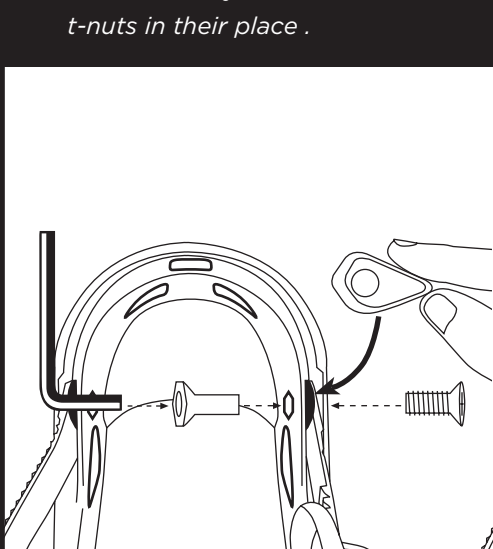
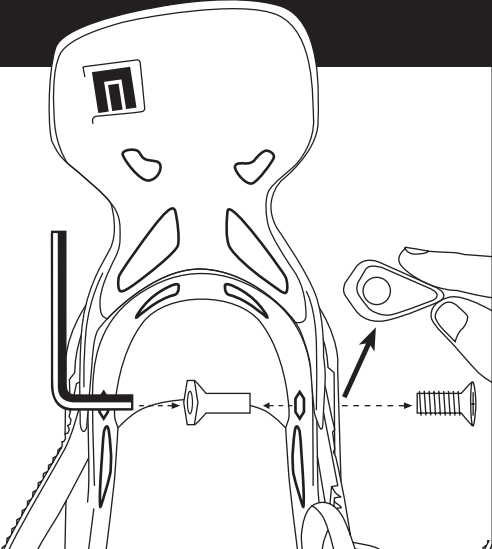




NoBack mode with HighCups.

Step 1: Remove highback by removing hardware on both sides with a phillips #3 and a 4mm allen key.


Step 2: Replace HighBack with HighCup and re-install the hardware. *Note: make sure that the t-nuts are properly fitted in the binding cavity and use a 4mm allen key to hold the t-nuts in their place.*

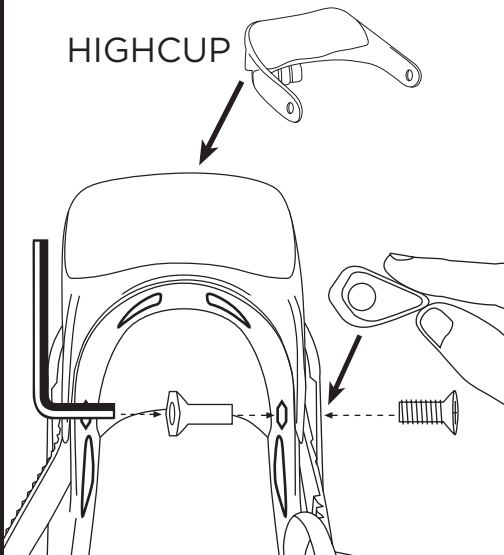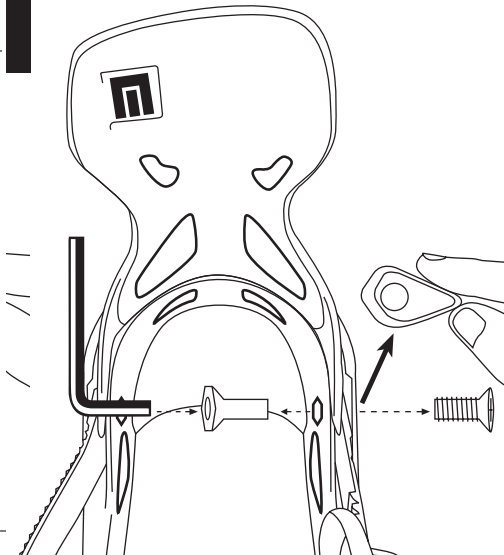



Forward Lean Adjustment


To change your forward lean, simply pull down the lever and move the forward lean block either up or down. When you reach the desired position, simply flip the lever back to the locked position.

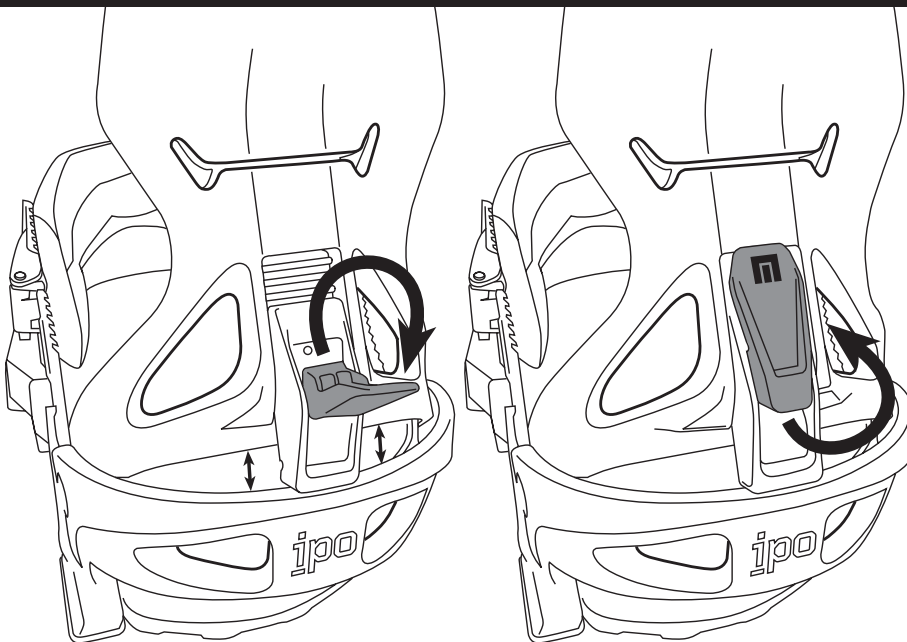



Closing the Foot Pillow


To close the foot pillow, simply push down on the EVA while the other hand is on the heelcup pulling upwards. You will hear a CLICK on both sides when the foot pillow is properly closed.

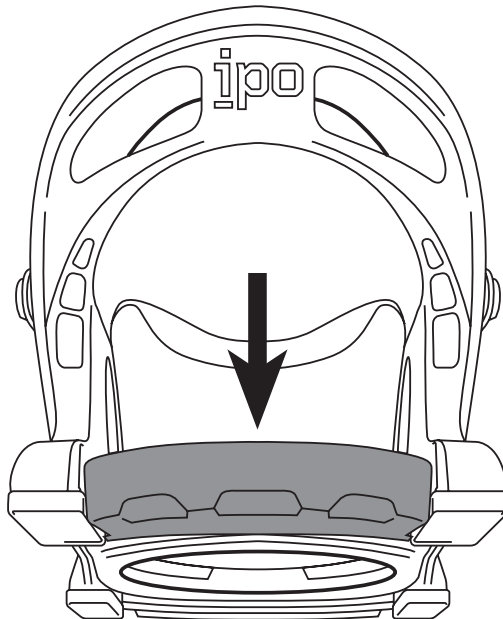



Custom Bushing Options

Now bindings come assembled with Medium density bushings. These bushings can be changed depending on your style of riding, snow conditions, weight or personal preference. To remove the bushings simply pop them out with your finger. Toe and heel bushings are different, so check the underside label before installing.

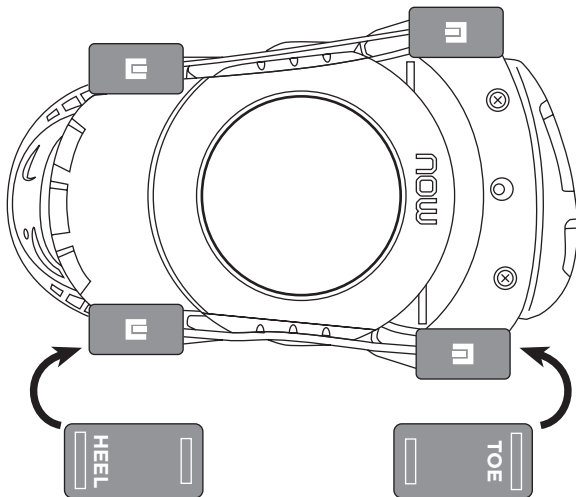

Three Bushing Densities

SOFT (45 shore)

MEDIUM (50 shore)

HARD (60 shore)





L I F E T I M E WARRANTY

Warranty

Now Snowboarding offers to the original purchaser a lifetime warranty on the baseplate components (Hanger and Alumi-ring), along with a one year limited warranty on all other parts. This warranty is not transferable, and Now reserves the right to repair or replace the faulty parts at its own discretion.





now

RIDERS, BE ADVISED: Snowboarding is a hazardous sport, which can result in serious injury or death to yourself or others. Use these Now bindings at your own risk. Check and tighten hardware before each use. Use only snowboard specific boots. Read this instruction manual when installing your Now bindings and before use. This binding does not release on impact. A runaway snowboard is a dangerous object and it can cause serious injuries or death – you are responsible so be aware. In compliance with ISO code 14573, you are required to wear a leash at all times. The leash must be attached to your bindings baseplate and securely fastened to your body.

For more details visit now-snowboarding.com





Twitter: @nowbindings

Instagram: @nowbindings

Facebook:/nowsnowboarding

www.now-snowboarding.com





now

RETHINK
YOUR RIDE

